

NKS 高导热双面胶带

NKS High Thermally Conductive Adhesive Tape

NKS 高导热双面胶由先进的导热压敏胶制作而成，满足高附着强度和极好导热效率的要求，为电子机械元件中发热元件和散热器或其他冷却设备之间提供了更好的导热途径。

NKS High Thermally Conductive Adhesive Tapes are made of advanced thermal conductive PSA. They satisfy the demand of high adhesion and excellent thermal conductive efficiency by providing a preferential heat-transfer path between heat-generating components and heat sink or other cooling devices.





主要特点 Key Features:

- 高粘性导热压敏胶，通过压合即可达到极佳的贴合和导热效果。
- ★ High tacky thermal conductive PSA. Only pressure is needed to form an excellent bond and thermal interface.
- 兼具导热、绝缘、缓冲、高粘等性能，是相关电子产品应用的最佳选择。
- ★ The performance of thermal conductivity, insulation, buffer and high tacky make it as the best choice for electronic application.
- 柔软易贴，适用于不平整表面机构之组装。
- ★ Flexible and conformable. Ideal for uneven surfaces.
- 稳定、经济，有不同的厚度和结构可选择。
- ★ Stable and economical with different thicknesses and constructions.

应用领域 Application Ideas:

- LED 光条元件和金属边框的组装。
- ★ Assembly of LED light bar module and metal frame bezel.
- DDR-RAM 模组与散热器的组装。
- ★ Assembly of DDR-RAM module and heat sink.
- 电子元件：IC, COP, CPU, MOS 等
- ★ Electronic components: IC, COP, CPU, MOS, etc.
- M/B, PS, PCB, LCD, PDP, PC 等
- ★ M/B, PS, PCB, LCD, PDP, PC, etc.

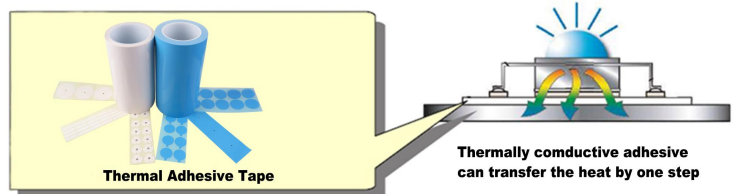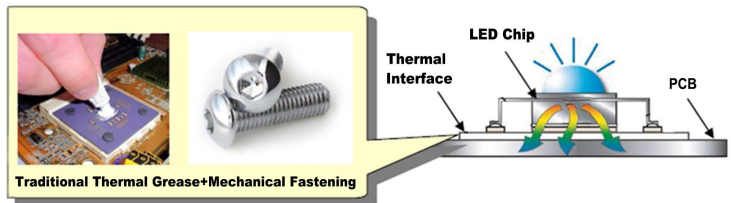

产品结构 Product Construction:

NKS-## Series



性能参数 Physical Properties:

型号 Item	NKS-##	测试方法 Test Method
基材 Carrier	玻纤 Glass Fabric	---
胶性 Adhesive	导热压敏胶 Thermally Conductive PSA	---
总厚度 (mm) Total thickness (mm)	0.1-0.5	ASTM D374
颜色 Color	白色 White	VISUAL
离型层 Release Liner	离型膜/离型纸 (白色、蓝色等) Release Film/ Release Paper (White/ Blue etc.)	VISUAL
粘着力(N/25mm) Adhesion (N/25mm)	12~18	PST-101
导热系数(W/m-k) Thermal Conductivity(W/m-k)	1.2	ASTM D22470
耐电压(KV/mm) Voltage Resistance(KV/mm)	3.5~8.0	ASTM D149
短期耐温 (℃/℉) Temperature Resistance(Short Term, ℃/℉)	120(℃) 248(℉)	EN344
长期耐温 (℃/℉) Temperature Resistance(Long Term, ℃/℉)	80(℃) 176(℉)	EN344
标准宽度 (mm) Standard width (mm)	2~1240 (可定制) 2~1240(Customized Available)	
标准长度 (m) Standard length (m)	25/50 (可定制) 25/50(Customized Available)	

注：以上数据仅作参考，详细资料可咨询我司。

Notice: The above were reference value. For detail information, please contact Naikos.



厦门奈克斯新材料有限公司
Naikos(Xiamen) Adhesive Tape Co.,Ltd.

Storage Conditions:

As of the date of the product to the factory, avoid direct sunlight and low temperature (0 °C), high temperature (below 40 °C), placed under the environment of high humidity (60% RH), can be stored for 12 months;

Notice:

All physical properties, statements, and recommendations are based either on tests we believe to be reliable or our experience, but they are not guaranteed. Naikos recommends each user determine the suitability of the product for the intended purpose.

Warranty and Limited Remedy:

THE FOLLOWING WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.

Naikos warrants its tape will be free from defects in material and manufacturer. If a tape is proved to be defective, then the exclusive remedy, and Naikos' and seller's sole obligation shall be, at Naikos' option, to replace the quantity of the tape which is proved to be defective or to refund the purchase price.

Limitations of Liability:

Except where prohibited by law, Naikos will not be liable for any loss or damage arising from the Naikos' product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

The forgoing Warranty and Limited Remedy and Limitation of Liability may be changed only by a written agreement signed by authorized officers of Naikos and seller.

NAIKOS(XIAMEN) ADHESIVE TAPE CO.,LTD

Tel: +86-592-7152818

Fax: +86-592-7152858

Email: ocs9@xmnks.com

Web: www.xmnks.com / www.nkstape.com

Add: No.48, Huli Industrial Park, Meixi Street, Tong'an District, Xiamen City, Fujian, China